
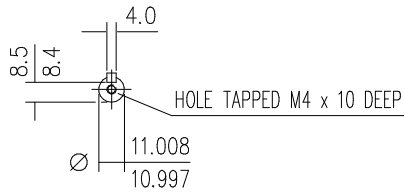


DRAWING NUMBER  
D64GC005/2

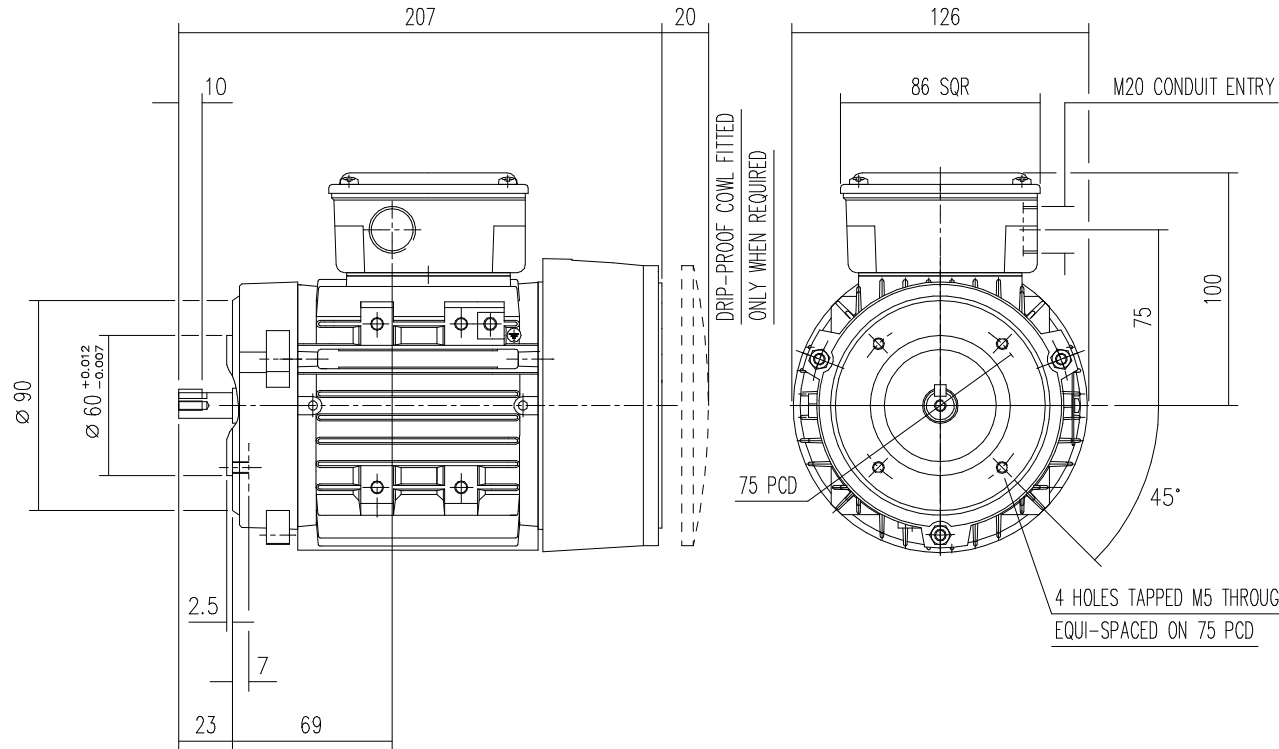

TERMINAL BOX CAN BE ARRANGED IN 9 OR 3 O'CLOCK POSITIONS.  
CONDUIT ENTRY CAN BE ARRANGED IN 4 ALTERNATIVE POSITIONS.  
ALL DIMENSIONS IN MILLIMETRES.  
CARE SHOULD BE TAKEN TO ENSURE THAT SCREWS OR FIXING STUDS DO NOT  
EXTEND INSIDE THE MOTOR BEYOND THE DEPTH OF THE THREAD FIXING HOLE.


CUSTOMER.		
ORDER No.		
SERIAL No.		
FRAME SIZE		
kW.	RPM.	
Hz	PHASE	
VOLTS	POLES	
BRGS.	DE.	NDE.
MOTOR NETT WT.		Kg.
DATE OF ISSUE		
SPECIAL REMARKS		

TITLE  
OUTLINE DIMENSIONS OF TEFV D63S FRAME 'C' MET FACE FLANGE MOUNTED ALUMINIUM M

DRN. A.H CK'D. D.J.R DATE 5 NOVEMBER 96

SHEET ALT 1 - FACE SPIGOT TOL'S TO IEC 72. RR 04-05-01.  
SIZE ALT 2 - TAPPED HOLE IN SHAFT TO M4. DH. 28-08-01

Q.A. APPROVED  
UNTOLERANCED M/C DIMENSIONS 0.13mm  
CERTIFICATED DRGS MUST NOT BE ALTERED WITHOUT BASEEFA  
APPROVAL. CERTIFICATE RELATED DRGS MUST NOT BE  
ALTERED WITHOUT DESIGN MANAGER'S APPROVAL.



SCALE HALF SIZE  
MAT'L. N/A  
DRAWING NUMBER

A3

D64GC005/2