


CUSTOMER		
ORDER No.		
SERIAL No.		
FRAME SIZE		
Kw	R.P.M.	
Hz	PHASE 3	
VOLTS	POLES	
BRGS.	D.E	N.D.E
MOTOR NETT. WT.		Kg.
INSULATION CLASS		
TEMPERATURE RISE		° C
DESIGN AMBIENT TEMPERATURE		° C
HEATER WATTS & VOLTS (IF FITTED)		
- WATTS,		- VOLTS

REMARKS

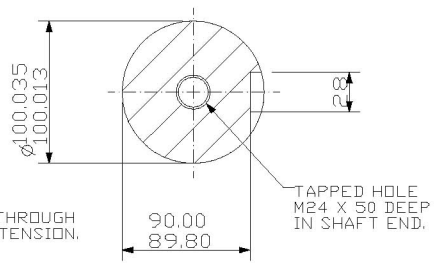

4 HOLES FOR M24 BOLTS.

8 HOLES $\phi 24$ EQUALLY SPACED ON 740 P.C.D.

NOTE!
TERMINAL BOX CAN BE SIDE MOUNTED (LEFT OR RIGHT) BY REFITTING FEET 90° IN APPROPRIATE DIRECTION. CABLE ENTRY CAN BE SUPPLIED IN ANY ONE OF FOUR POSITIONS AT 90° INTERVALS.

ALL DIMENSIONS IN MILLIMETRES



BROOK CROMPTON

NOTE!
2.5 ENDPLAY WILL BE PROVIDED FOR ENDTHRUST PROTECTION WHEN CUSTOMERS NOTIFY US OF THEIR INTENTION TO USE RIGID COUPLINGS AND DRIVEN MACHINES WITHOUT ENDPLAY.

OUTLINE DIMENSIONS OF STANDARD FOOT MOUNTED METRIC A.C. MOTOR WITH "D" FLANGE AT DRIVE END. TOTALLY ENCLOSED FAN VENTILATED. FRAME SIZE:- W-DF355S-H 4-POLE UP.

SCALE	1:10	DATE
DRAWN		
CHECKED		
APPROVED		

DRG. No.		
REVISION:		DATE